


ECOLIFT™ SERIES

Non-powered Vertical Lifts



The Ecolift Revolution:
A Game Changer in Power-Free Access

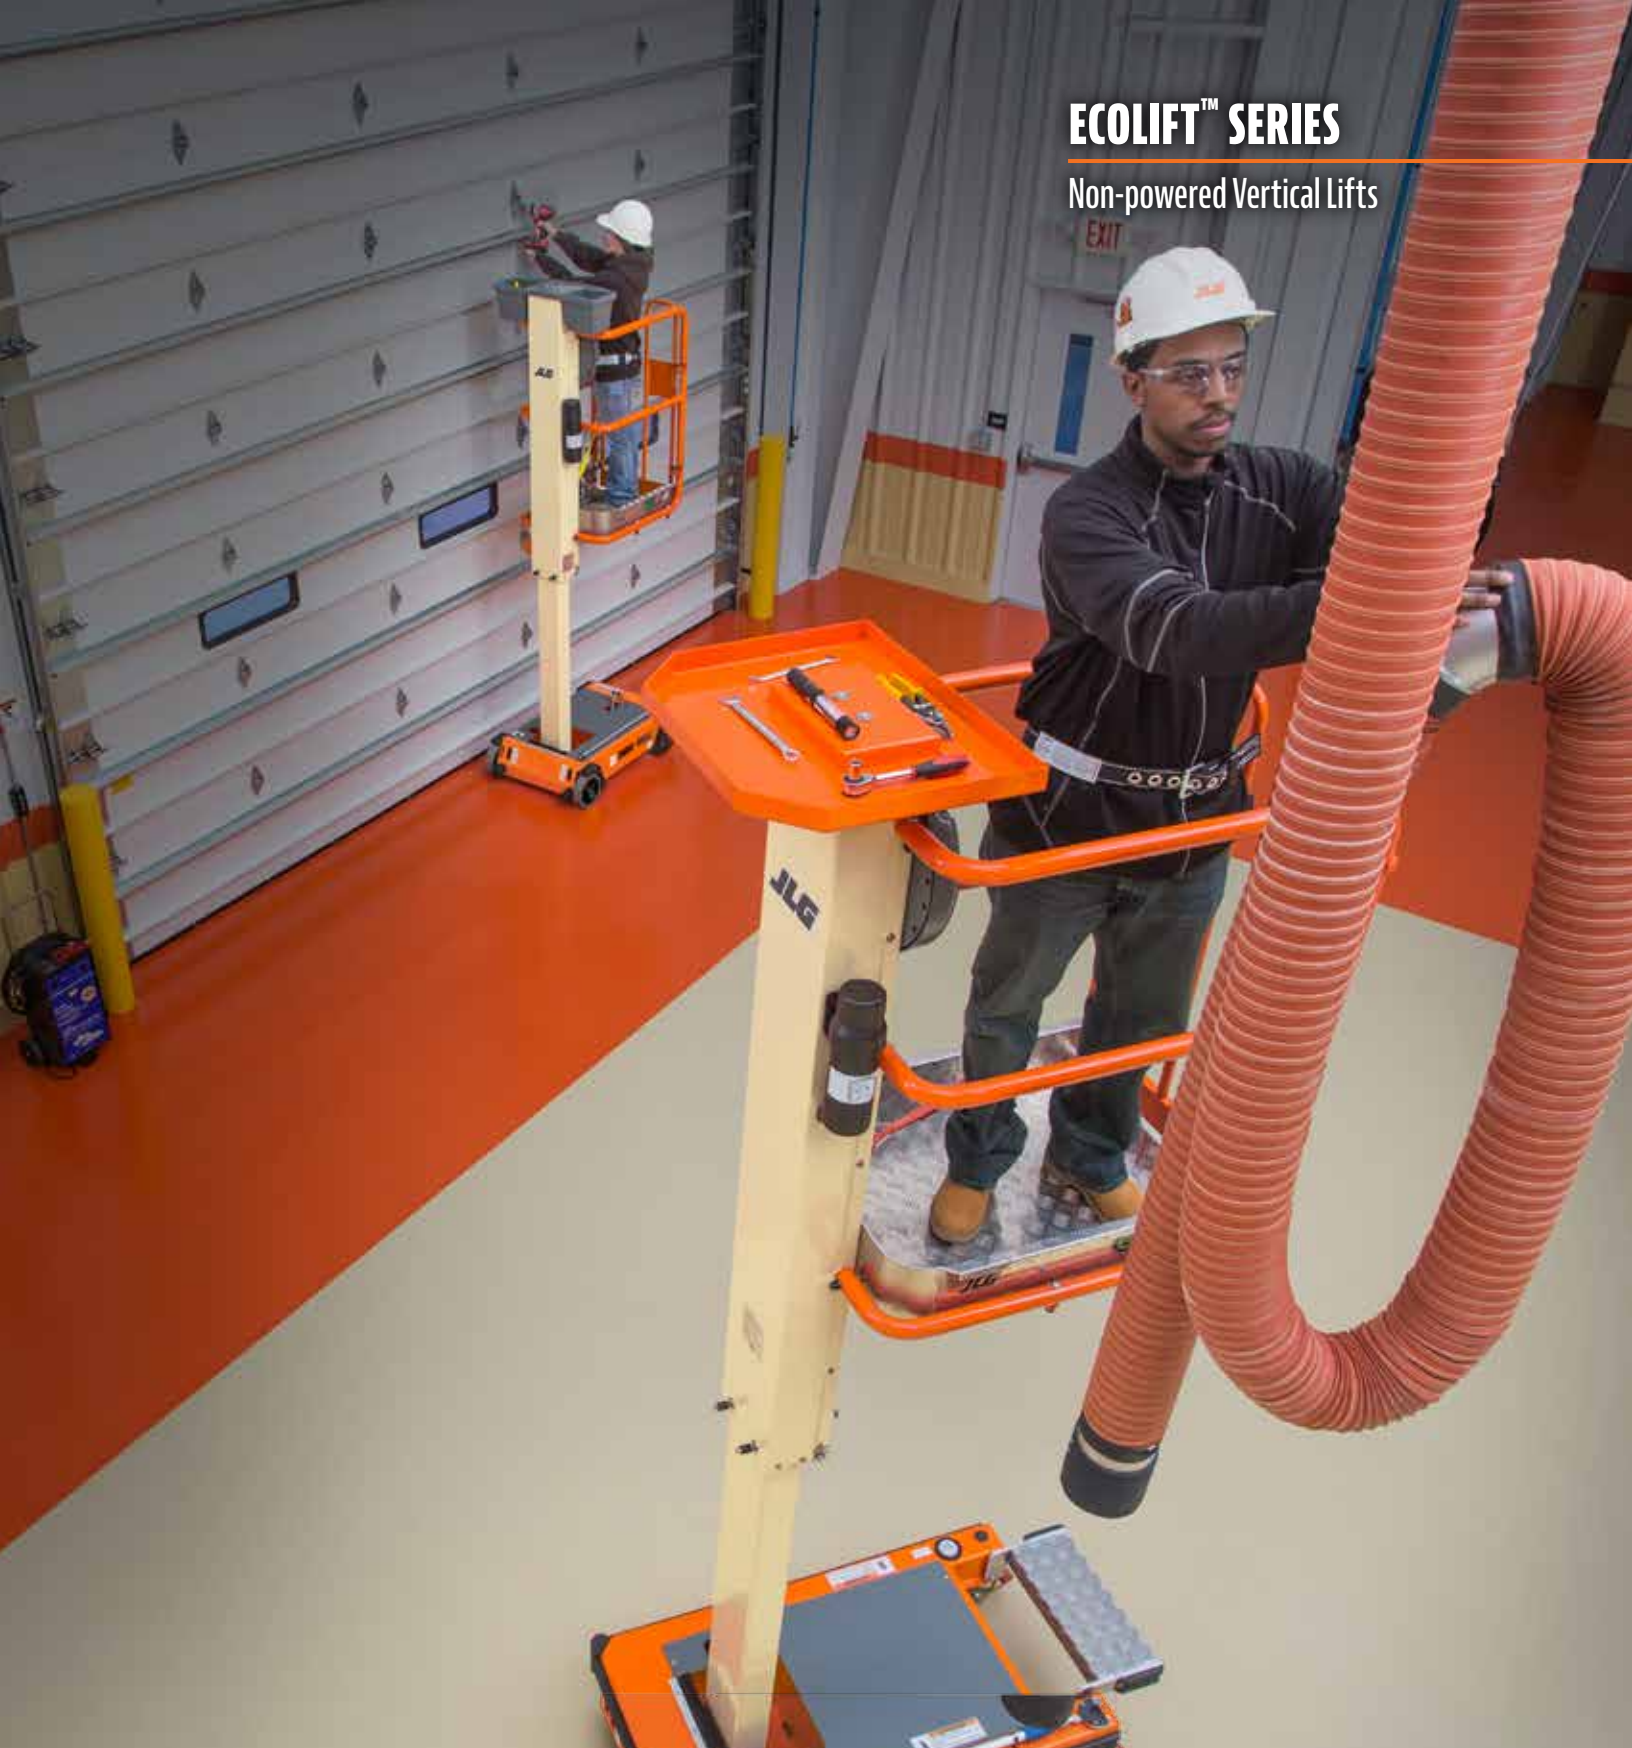



RISE ABOVE WITH A POWER-FREE LIFT

The EcoLift Series is a safe and versatile alternative to ladders and scaffolding. These revolutionary lifts have no batteries, hydraulics or oil, making them low maintenance and easy to use. The EcoLift Series features:

- **Innovative Power-free Design**
Patented stored power lift/lower system offers 24/7 use and trouble-free service
- **Small Footprint**
Lightweight and easy to maneuver around all areas of a facility
- **Safe and Easy to Use**
Sturdy base, automatic locking wheels and a simple lift mechanism let you work confidently with both hands
- **Eco-friendly**
Clean, green operation with no oil, batteries or hydraulics

Work quietly, and work efficiently. Add the EcoLift to your team today.

The clean, quiet and compact EcoLift lets you work without disrupting sensitive or low-noise environments.



ECOLIFT 50

Lightweight and maneuverable, the EcoLift 50 is raising the bar for low-level access. This lift contains very few moving parts for reliable, hassle-free maintenance, and delivers clean, quiet performance. The EcoLift 50 features:

- Working height of 10 ft 11 in. (3.33 m) and 330 lb (150 kg) capacity
- Stable base and automatic braked wheels at height
- No setup time — push into place and get to work



ECOLIFT 70

For light construction or facility maintenance, the EcoLift 70 transforms low-level access, giving you a safer, more efficient alternative to ladders. One-person operation is quick and intuitive, letting you finish the job with virtually no downtime.

The EcoLift 70 features:

- Working height of 13 ft 2.5 in. (4.03 m) and 330 lb (150 kg) capacity
- Sturdy base for working confidently with both hands
- Small footprint, making it easy to maneuver through narrow spaces



FEATURES



Compact and Portable
Fit through narrow doorways and maneuver around obstacles.



Easy Access
Convenient full-height, saloon-style gates allow effortless entry and exit.



Raise and Lower with Ease
The simple and innovative stored power lift mechanism lets you quickly raise and lower the platform without batteries or hydraulics.



Work with Confidence
Swivel wheels lock into place for enhanced comfort and security.



Specifications

	EcoLift 50	EcoLift 70
Working Height	10 ft 11 in. (3.33 m)	13 ft 3 in. (4.03 m)
Platform Height	4 ft 11 in. (1.50 m)	7 ft 3 in. (2.20 m)
Stowed Height	5 ft 1 in. (1.55 m)	6 ft 4 in. (1.94 m)
Stowed Width	2 ft 4 in. (0.7 m)	2 ft 4 in. (0.7 m)
Stowed Length	3 ft 3 in. (0.985 m)	4 ft 2 in. (1.28 m)
Platform Size	28 x 24 in. (72 x 60 cm)	33 x 25 in. (85 x 64.4 cm)
Rated Capacity	330 lb (150 kg)	330 lb (150 kg)
Weight	397 lb (180 kg)	672 lb (305 kg)

Standard Features

- Intuitive operation — turn handle to elevate
- Patented stored power lift/lower system needs no oil, batteries or hydraulics
- Lightweight and easy to maneuver through tight areas
- Unlimited lift cycles for 24/7 service
- Fewer parts for minimal maintenance
- Auto-lock brake on elevation
- Mechanically detented handle

Applications

- Commercial and residential painting
- Facility maintenance
- Displays and decorating
- HVAC maintenance
- Renovations and remodeling
- Plant maintenance
- Equipment maintenance installers — cable, security, professional



VISIT JLG.COM TODAY TO LEARN MORE ABOUT THE ECOLIFT AND TO LOCATE A DEALER NEAR YOU.



The JLG "1 & 5" Warranty

JLG Industries, Inc., backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.3-2006, and CSA Standard CSA B354.4, as originally manufactured for intended applications.

Part No.: 3132135
R041703
Printed in USA

JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com

An Oshkosh Corporation Company